


DL

PRODUCT NOMENCLATURE

100	DL	100	15	7.5
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated Head (m)	Power (kW)

RANGE CHARACTERISTICS

Power	0.75-7.5kW
Poles	2
Discharge	DN50 - 100
Max flow rate	130 m³/h
Max head	35 m

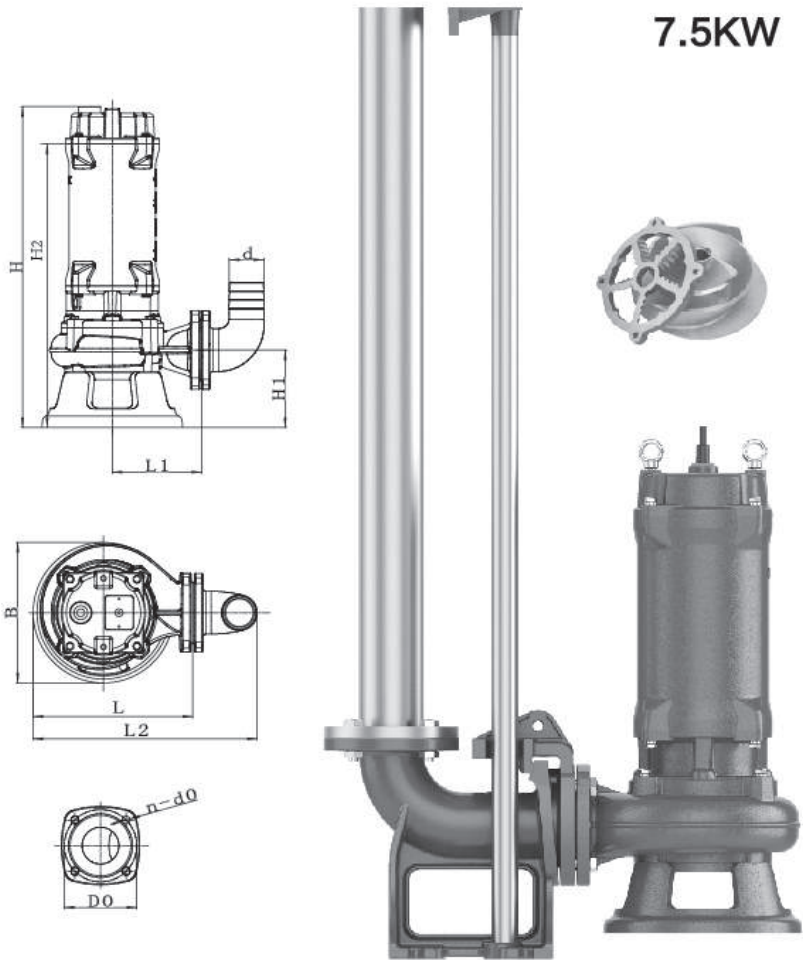


DIMENSION

Type	A (mm)	L (mm)	L2 (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	d (mm)	D0 (mm)	n-d0 (mm)
50DL15-15-1.5	50	237	309	122	186	453	94	378	48	110	13
50DL15-15-1.5	50	237	309	122	186	453	94	378	48	110	13
65DL25-10-1.5	65	237	352	131	212	485	111	409	62	130	13
65DL25-15-2.2	65	286	400	160	252	503	128	426	62	130	13
80DL45-9-2.2	80	286	405	160	252	503	128	426	74	150	18
80DL45-12-3.0	80	270	390	165	219	555	120	487	74	150	18
80DL50-15-4.0	80	290	410	164	253	576	139	509	74	150	18
100DL65-12-4.0	100	301	410	175	252	635	198	578	100	170	18
100DL70-15-5.5	100	310	470	170	280	645	146	575	100	170	18
100DL100-15-7.5	100	320	480	180	293	655	152	585	100	170	18




DL

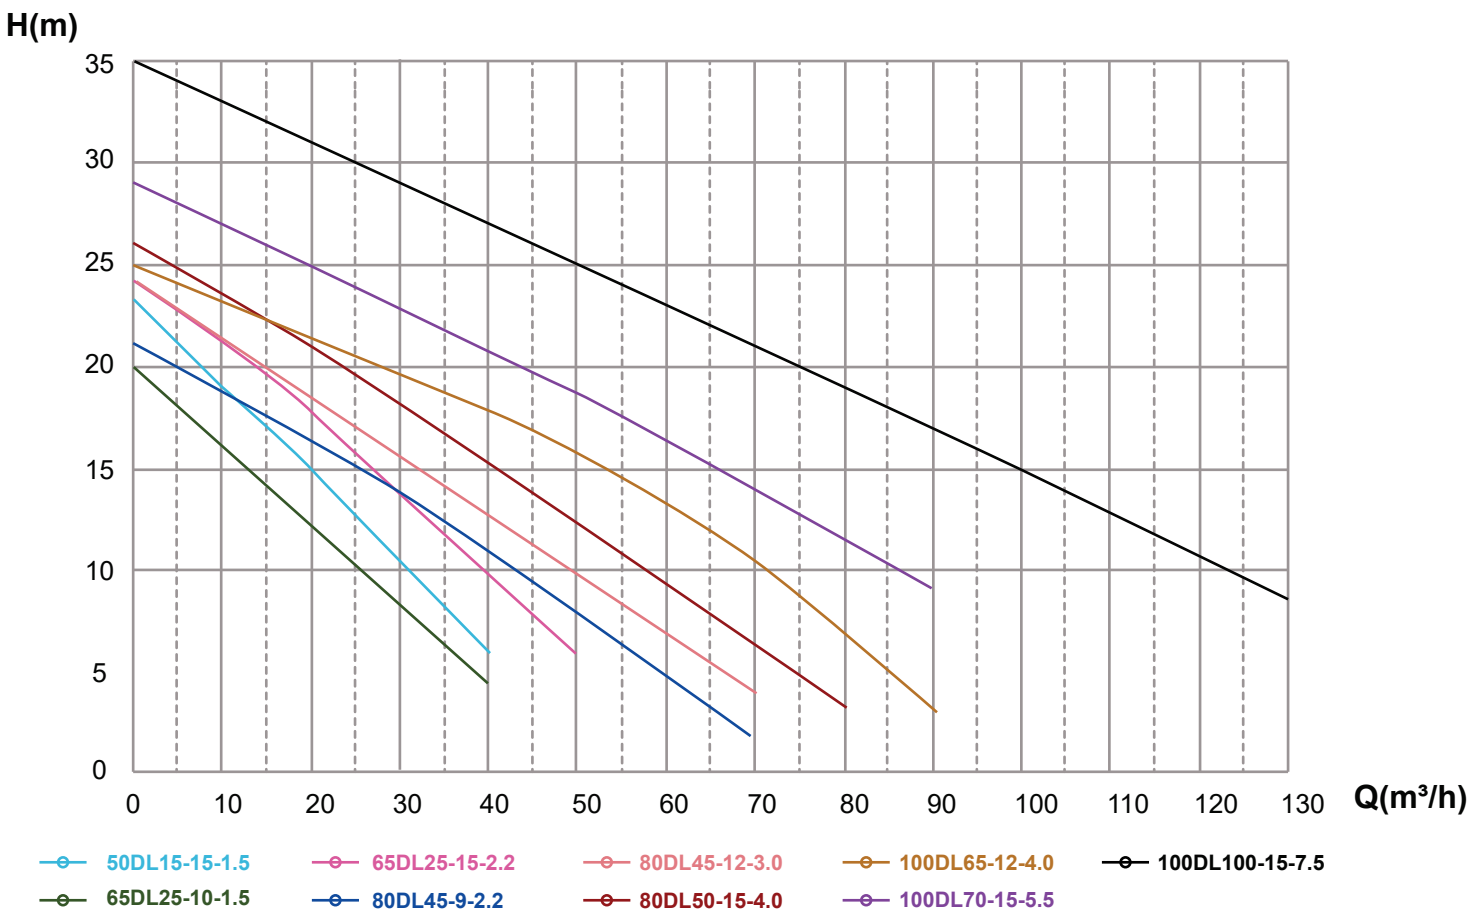

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m³/h)	0	10	20	30	40	50	60	70	80	90	100	110	120	130
				Q (l/min)	0	167	333	500	633	783	1000	1167	1267	1500	1667	1783	2000	2160
50DL15-15-1.5	1Ph/220V	1.5	2	H(m)	23	19	13	11	6									
50DL15-15-1.5	3Ph/380V	1.5	2		23	19	13	9	6									
65DL25-10-1.5	3Ph/380V	1.5	2		20	16	12	8	4									
65DL25-15-2.2	3Ph/380V	2.2	3		24	21	18	14	9	6								
80DL45-9-2.2	3Ph/380V	2.2	3		21	18	16	14	11	8	5	2						
80DL45-12-3.0	3Ph/380V	3	4		23	21	18	16	13	11	7	3						
80DL50-15-4.0	3Ph/380V	4	5.5		26	24	22	20	18	15	11	7	3					
100DL65-12-4.0	3Ph/380V	4	5.5		25	23	21	19	17	15	13	11	7	2.9				
100DL70-15-5.5	3Ph/380V	5.5	7.5		29	27	25	23	21	19	17	14	12.7	8.6				
100DL100-15-7.5	3Ph/380V	7.5	10		35	33	31	29	27	25	23	21	19	17	15	13	11	8


150	DL	200	20	18.5
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated Head (m)	Power (kW)

Power	7.5-18.5kW
Ports	2 2
Discharge	DN150
Max flow rate	240 m³/h
Max head	46 m

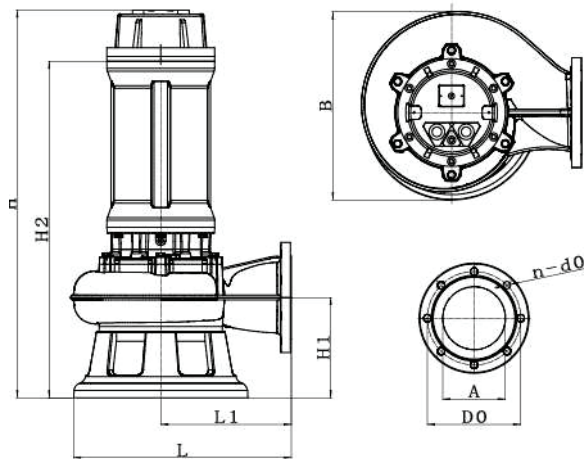

Type	A (mm)	L (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	D0 (mm)	n-d0 (mm)
150DL120-10-7.5	150	354	210	302	770	232	705	225	8-18
150DL150-15-11	150	525	315	455	930	242	790	255	8-18
150DL150-25-15	150	525	315	455	930	242	790	255	8-18
150DL200-20-18.5	150	525	315	455	1030	242	890	255	8-18

DL

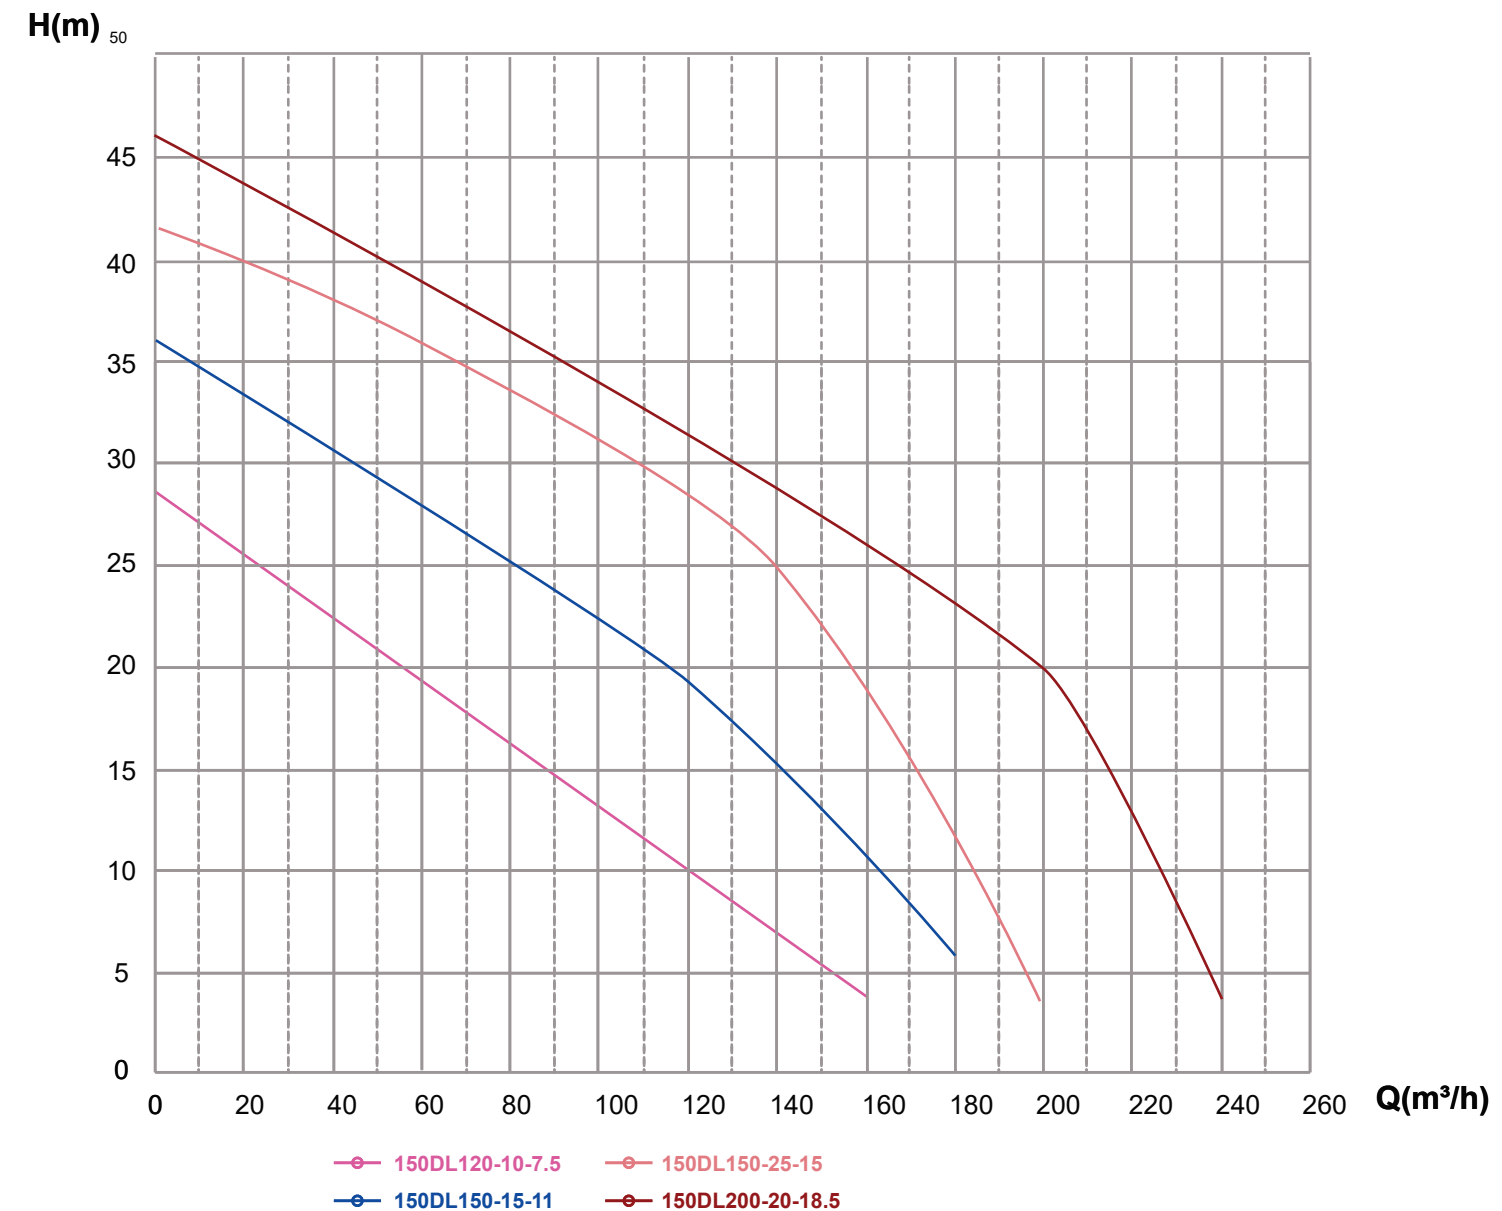

Type	Voltage (V)	Power		Q (m³/h)	0	20	40	60	80	100	120	140	160	180	200	220	240
		(KW)	(HP)	Q (l/min)	0	333	633	1000	1267	1667	2000	2333	2667	3000	3333	3667	4000
150DL120-10-7.5	3Ph/380V	7.5	10	H(m)	28	26	23	19	16	13	10	7	3				
150DL150-15-11	3Ph/380V	11	15		36	34	31	28	25	22	19	16	12	6			
150DL150-25-15	3Ph/380V	15	20		42	40	37	36	33	31	28	25	19	12	3		
150DL200-20-18.5	3Ph/380V	18.5	25		46	44	42	39	36	34	31	29	26	23	20	13	3

PRODUCT NOMENCLATURE

150	DL	300	15	22 / 4
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated Head (m)	Power (kW) Pole


RANGE CHARACTERISTICS

Power	18.5-22kW
Poles	4
Discharge	DN150
Max flow rate	420 m³/h
Max head	33 m



DIMENSION

Type	A (mm)	L (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	D0 (mm)	n-d0 (mm)
150DL250-15-18.5/4	150	610	360	500	1060	265	905	255	8-18
150DL300-15-22/4	150	610	360	517	1060	265	905	295	8-22

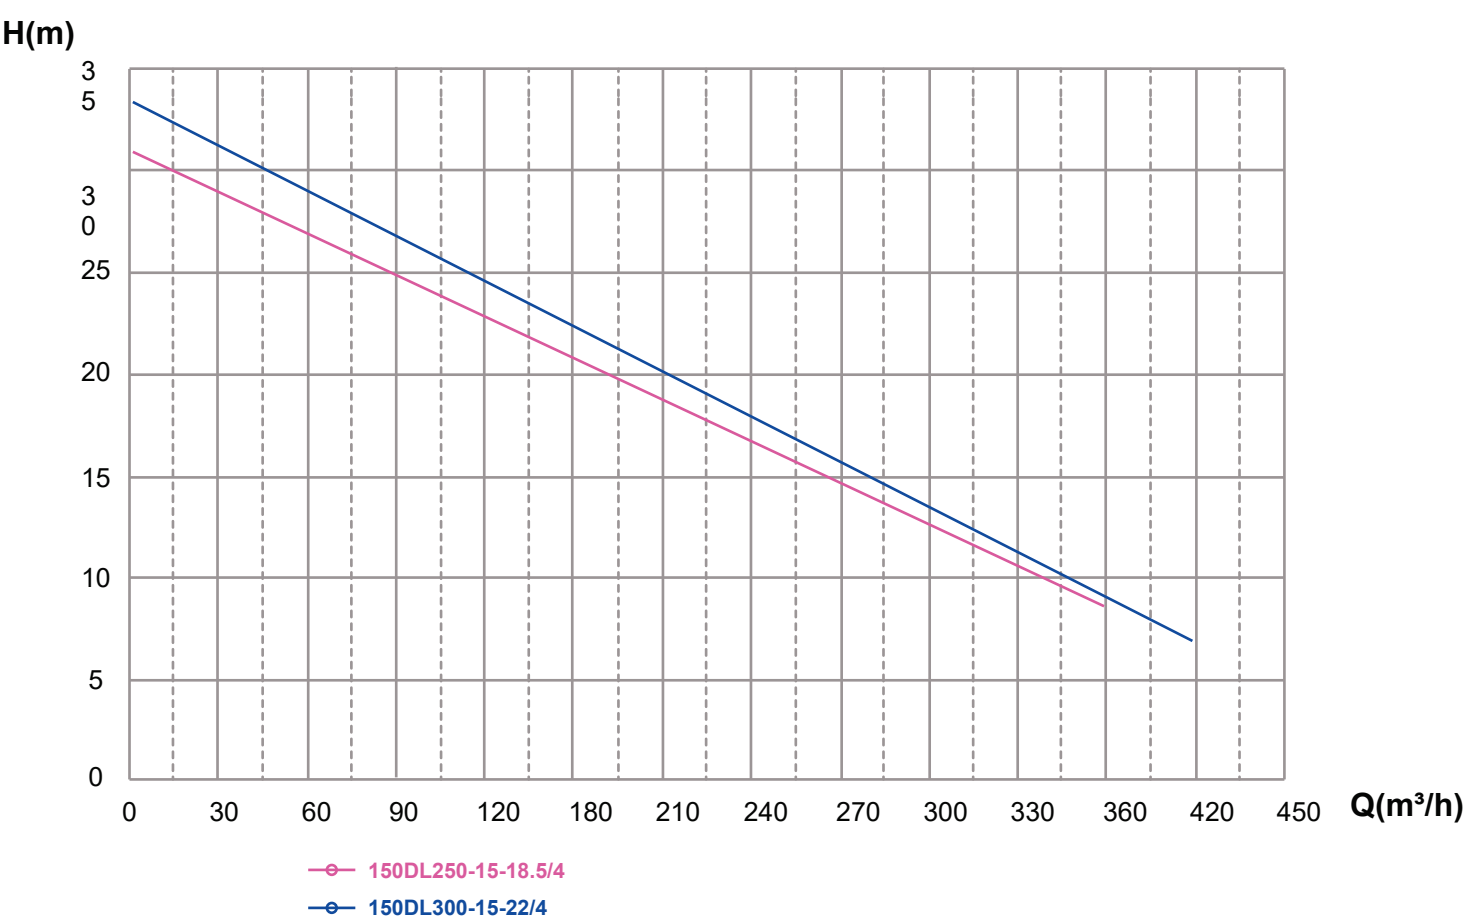

Type	Voltage (V)	Power		Q (m³/h)	0	30	60	90	120	180	210	240	270	300	330	360	420
		(KW)	(HP)		0	500	1000	1500	2000	3000	3500	4000	4500	5000	5500	6000	7000
150DL250-15-18.5	3Ph/380V	18.5	25	H(m)	31	29	27	25	23	21	19	16	14	12	11	8	
150DL300-15-22.5	3Ph/380V	22	30		33	31	29	27	25	23	21	19	17	15	13	11	7